



VHF AND UHF TRANSCEIVERS

IC-F5063 (VHF transceiver)

IC-F6063 (UHF transceiver)



Rugged
MIL-STD 810



F5063

F6063

512 ch /
128 zones

Conventional /
LTR mode

2-Tone, 5-Tone
CTCSS, DTCSS

VHF 25W,
UHF 25W Output

IP54
(Controller only)

Full dot-matrix
LCD



b0 b1 b5 b3 b4



Conventional/LTR/Digital*— Multi-Mode Professional Mobile

*With UT-119H

The IC-F5063/F6063 is ideal for public safety, transportation and delivery service users. It offers a full dot-matrix display, improved scanning and flexible installation suitable for mobile and base stations.

VHF TRANSCEIVER
IC-F5063 25W

UHF TRANSCEIVER
IC-F6063 25W



The above photo includes optional separation kit, RMK-3, and separation cable, OPC-609.



Detachable front panel

With the optional remote control kit, RMK-3 and separation cable, the front panel of the radio can be detached from the main unit. It allows you flexible installation even in limited installation space.

Dot matrix, multi-function LCD

With a high contrast dot matrix display, upper and lower case characters can be easily distinguished. You can change the display setting to show one line and 12 characters, or two lines and 24 characters via programming. LCD backlighting is standard.



Two line setting display example.

Front mounted speaker

4 watts (typ.) front mounted speaker delivers clear and loud audio. The built-in audio compander improves the signal to noise ratio.

IP54 dust-protection and splash resistance (Controller only)

The rugged die-cast chassis and polycarbonate front panel are resistant to shock and vibration. When used with the optional separation kit, the remote control head has dust-protection and splash resistant construction, equivalent to IP54.

Basic LTR/Conventional mode operation

Both conventional and LTR mode channels are programmable in a radio. MDC signaling is also available on LTR mode.

Multiple 2-Tone, 5-Tone signalings

The built-in 2-Tone and 5-Tone capabilities allow you to send a tone code with your call and decode multiple tone codes on a channel. 40 pairs of CTCSS/DTCS memory channels are also available.

MDC 1200 compatible

The following selective calling and ANI

features are available with the built-in MDC 1200 signaling.

- PTT ID
- Radio check
- Caller ID
- Emergency, emergency mic monitoring
- Selective call
- Radio stun/revive
- 500 Aliases
- Status/message
- Call alert
- Call log

BIIS 1200 compatible

The following selective calling and data features are available with the built-in BIIS system.

- 32 abbreviated call memories
- 7 group IDs
- 24-status Messages
- Send 12-character SDM (Short Data Message)
- Receive up to 95 characters of text

Mode slave scan

In the normal mode scan, you can select a scanning list independent to the channel setting. In the mode slave setting, the scanning list is automatically selected according to the operating channel. It is convenient when you change operating channels or move to a different operating area, you don't need to change the scanning setting.

Voting scan

The voting scan detects the S-meter level of repeater stations and automatically selects the strongest station or the first station to exceed the preset S-meter level, useful for roaming between two or more repeater sites.

Wide frequency range and large channel capacity

The IC-F5063 series covers a wide frequency range in one version (VHF 136-174MHz, UHF 400-470 or 450-520MHz). The 512 memory channel capacity with 128 zones allows you to divide and store a variety of flexible channel groupings.

Built-in inversion-type voice scrambler

The built-in inversion type voice scrambler provides secure conversation. When a more secure system is required, the

32 code non-rolling-type voice scrambler UT-109R and 1020 code rolling type UT-110R are available as an option.

D-sub accessory connector

The IC-F5063 series has a D-SUB 25 pin ACC connector for connecting various external devices.



Other features

- 8 DTMF autodial memories and ANI function with DTMF
- Optional heavy duty, dynamic microphone HM-148
- Power on password
- Radio stun and kill functions disable a lost or stolen unit over the air
- Busy repeater lockout function
- Surveillance function temporarily turns off the LED backlight and beep sound
- Convenient key assign stickers are supplied
- Microphone hanger action programmable
- Ignition sensing line
- Embedded ESN
- Flash CPU for future upgrade
- The IC-F3063/ F4063 series is the handheld equivalent model and more...

DIGITAL

6.25kHz Digital mode ready*

With the optional UT-119H, the IC-F5063 series provides 6.25kHz digital narrow mode communication, and increases efficiency of channel allocation and use of spectrum.

The IC-F5063 series provides 2 optional slots: one optional slot for the UT-119H digital unit and one for another option board.

*This option may not be available in some countries. Please ask your dealer for details.



SPECIFICATIONS

GENERAL	
Frequency range :	IC-F5063 136-174MHz IC-F6063 400-470MHz 450-520MHz
Number of channels :	Max. 512 channels/ 128 zones
Channel spacing :	12.5/25kHz, 6.25kHz (option)
PLL channel step :	2.5, 3.125kHz
Antenna impedance :	50Ω nominal
Power supply requirement :	13.2V DC
Current drain (approx) :	Tx at 25W 7.0A Rx Max. audio 1200mA Stand-by 300mA
Operating temperature range :	-30°C to +60°C
Dimensions (W×H×D) :	160×45×150 mm (Projections are not included)
Weight (approx.) :	1.3kg

TRANSMITTER	
Output power :	25W
Max. frequency deviation :	±5.0/2.5kHz (Wide/ narrow)
Frequency error :	±1.5kHz
Spurious emissions :	75dB typ.
Adjacent channel power :	70/60dB (Wide/ narrow)
Audio harmonic distortion :	3% typ. (40% deviation)
FM Hum and Noise :	45/40dB typ. (Wide/Narrow)
Limiting character of modulator :	70-100% of Max. deviation
External microphone impedance :	600Ω (8-pin modular)

RECEIVER	
Sensitivity :	0.25μV typ. (at 12dB SINAD)
Squelch sensitivity :	0.25μV typ. (at threshold)
Adjacent channel selectivity :	85/75dB typ. (Wide/ narrow)
Spurious response :	90dB typ.
Intermodulation :	77dB typ.
Hum and Noise :	50/45dB typ. (Wide/Narrow)
Audio output power :	4W typ. at 10% distortion with a 4Ω load
External speaker impedance :	4Ω

All stated specifications are subject to change without notice or obligation.

Supplied Accessories

- Hand microphone, HM-152
- DC power cable
- Microphone hanger
- Mounting bracket kit
- Key assign stickers

Applicable U.S. Military Specifications
The IC-F5063/F6063 and RMK-3 have been tested to and passed the following MIL-STD requirements and strict environmental standards.

Standard	MIL 810 C		MIL 810 D		MIL 810 E		MIL 810 F	
	Method	Proc.	Method	Proc.	Method	Proc.	Method	Proc.
High Temp.	501.1	I	501.2	I, II	501.3	I, II	501.4	I, II
Low Temp.	502.1	I	502.2	I, II	502.3	I, II	502.4	I, II
Temp. Shock	503.1	I	503.2	I	503.3	I	503.4	I
Rain Blowing*	506.1	I	506.2	I	506.3	I	506.4	I
Rain Drip*	506.1	II	506.2	III	506.3	III	506.4	III
Humidity	507.1	I, II	507.2	II, III	507.3	II, III	507.4	-
Vibration	514.2	VIII, X	514.3	I	514.4	I	514.5	I
Shock	516.2	I, II, V	516.3	I, IV	516.4	I, IV	516.5	I, IV

* Rain blowing and drip tests were performed on the controller and RMK-3 only.

OPTIONS


Some options may not be available in some countries. Please ask your dealer for details.



HM-152 : Regular microphone. Same as supplied.
HM-152T : DTMF microphone.
HM-148 : Dynamic microphone for heavy duty use.




SP-5 : Large external speaker.
SP-10 : Mid sized external speaker.
SP-22 : Compact and easy-to-install external speaker.

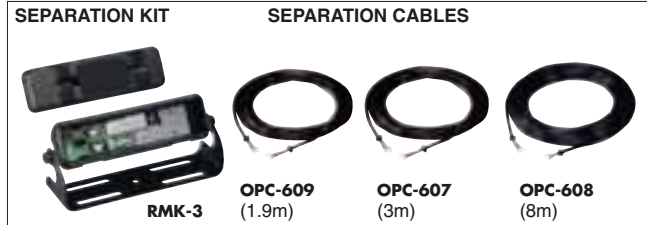

RMK-3 : For front panel detachment installation. Use with one of the following cables: **OPC-609** (1.9m), **OPC-607** (3m), or **OPC-608** (8m).



SM-25 : Convenient for dispatching, equipped with monitor switch.

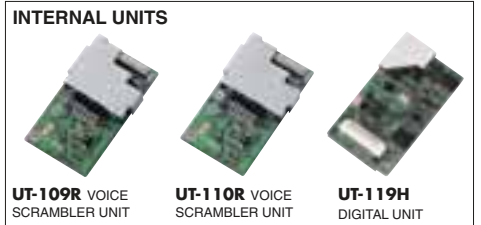

UT-109R : Non-rolling type voice scrambler.
UT-110R : Rolling type voice scrambler.
UT-119H : Digital unit. Provides 6.25kHz digital capability.

All trademarks are the properties of their respective holders.

Icom Inc.

1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

Icom America Inc. Icom New Zealand Icom (UK) Ltd. Asia Icom Inc.



Icom Canada

Icom (Europe) GmbH Icom France Icom (Germany) GmbH

Icom (Australia) Pty. Ltd. Icom (Spain) S.A.

HEAD OFFICE - PORT MORESBY BRANCH OFFICE - LAE
CAMERON ROAD, WAIGANI LAURABADA AVENUE, LAE
(T): +675 325 6322 (T): +675 472 6262
(F): +675 325 0350 (F): +675 472 1323
EMAIL: INFO@TEPNG.COM EMAIL: LAE@TEPNG.COM

VISIT OUR WEBSITE: WWW.TEPNG.COM